

Product Overview

The ATL-HDR-15-24 Power Supply is a cost effective, ultra slim unit providing a regulated 24Vdc output from an 85 to 264Vac input. The power supply is designed to provide 24Vdc to power DIN Rail Modules, but has many other uses where a cost effective DC supply is required. The ATL-HDR-15-24 features short circuit, over load & over voltage protection and is designed for mounting on TS35 section DIN rail.



Products Features

- Regulated 24Vdc Output at 0.63A
- Short Circuit, Over Load, Over Voltage
- LED Power Indication
- 85 to 264Vac or 120 to 370Vdc input
- High Quality Rising Clamp Terminals
- DIN Rail Mounting (TS35)


Product Specifications

Input Voltage:	(85 to 264Vac) or (120 to 370Vdc)
Input Frequency Range:	47 to 63Hz
Input Current:	0.25A / 230Vac
Input Inrush Current (max.):	COLD START 25A/115Vac 45A/230Vac
Output Voltage:	24V @ 0.63A
Output Voltage Adjustment Range:	24Vdc: 21.6V to 29V
Output Current:	24Vdc: 0 to 0.63A
Output Power:	24Vdc: 15.2W
Terminals:	Rising Clamp for 0.5-2.5mm ² Cable
LED Indication:	ON when power on
Ambient Temperature Range:	-30 to +70°C @ 20 to 90% RH
Safety Standards:	UL508, TUV EN60950-1 Approved
EMC Conduction and Radiation:	Compliance to EN55032, EN61000-3-2, -3
Weights & Dimensions:	17.5mm(W) x 90mm(H) x 54.5mm(D), 74grams
Country of origin:	Taiwan

Product Order Codes

Order Code	Description
ATL-HDR-15-24	Universal Input to 24Vdc Power Supply (15W)

Dimensions

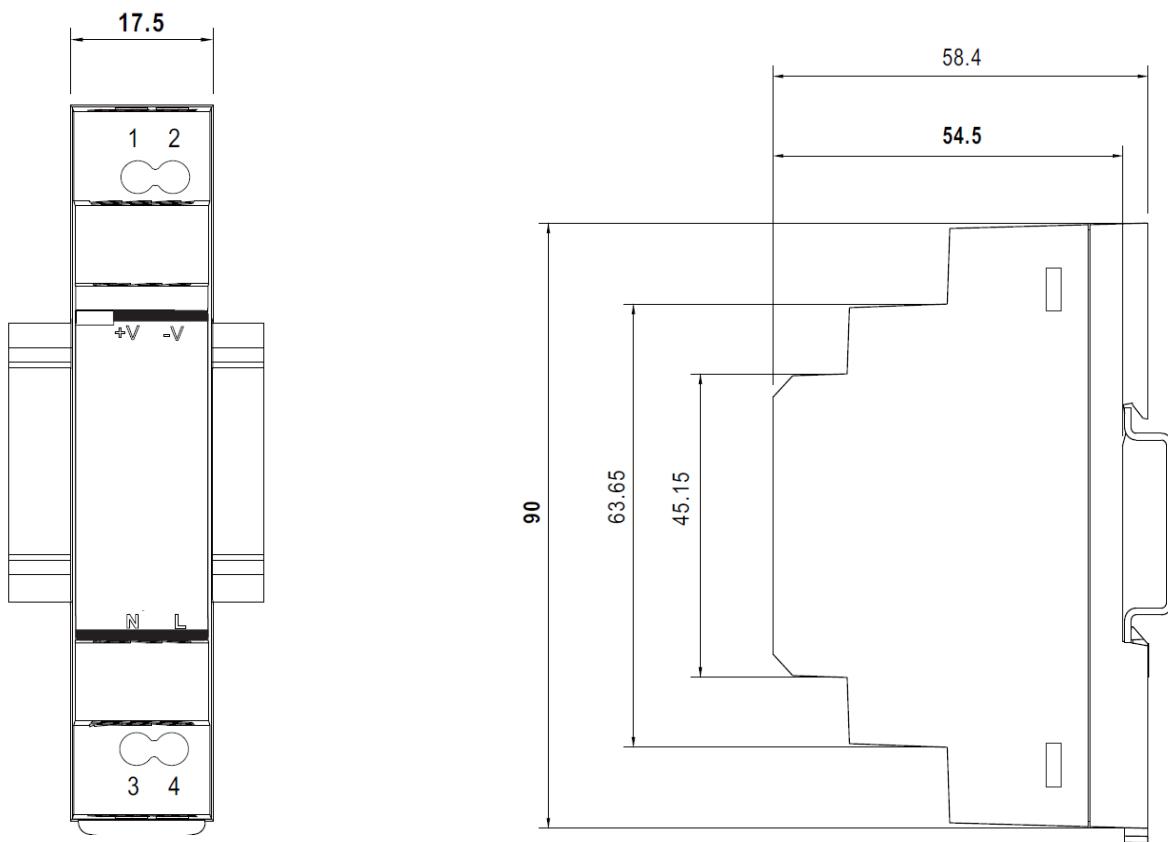

Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment
1	+V	3	AC/N
2	-V	4	AC/L

Block Diagram

