

Product Overview

The ATL-HDR-60-24 Power Supply is a cost effective, ultra slim unit providing a regulated 12 or 24Vdc output from an 85 to 264Vac input. The power supply is designed to provide 12/24Vac to power the ATL range of DIN Rail Modules, but has many other uses where a cost effective DC supply is required. The ATL-HDR-60-24 features short circuit, over load & over voltage protection and is designed for mounting on TS35 section DIN rail.



Products Features

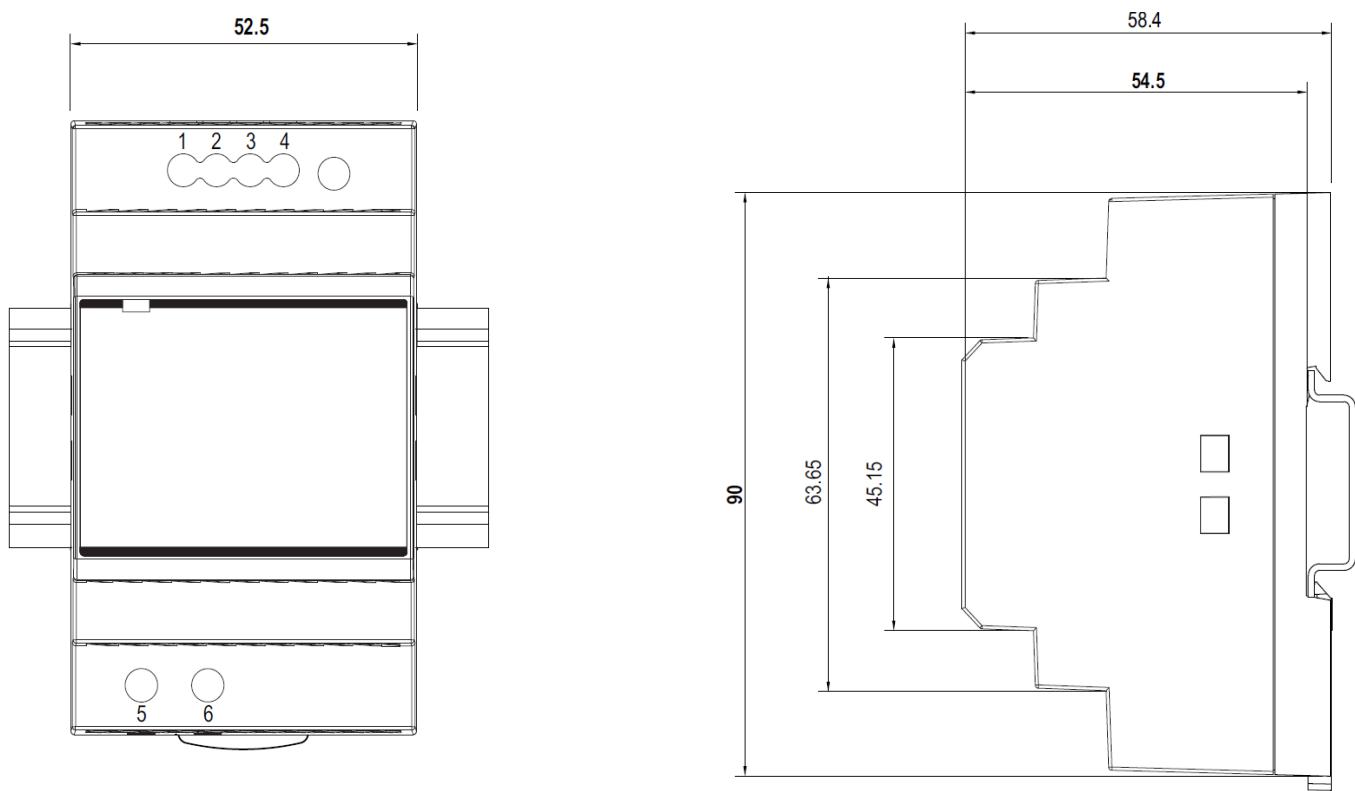
- Regulated 12/24Vdc Output at 5/2.5A
- Short Circuit, Over Load, Over Voltage
- LED Power Indication
- 85 to 264Vac or 120 to 370Vdc input
- High Quality Rising Clamp Terminals
- DIN Rail Mounting (TS35)

Product Specifications

Input Voltage:	100 to 240Vac
Input Frequency Range:	47 to 63Hz
Input Current:	1.8A @ 50/60 Hz
Input Inrush Current (max.):	25A @ 115Vac or 45A @ 230Vac
Output Voltage:	24V @ 2.5A
Output Voltage Adjustment Range:	12Vdc: 12 to 15Vdc 24Vdc: 21.6 to 29Vdc
Output Current:	12Vdc: 0 to 5A 24Vdc: 0 to 2.5A
Output Power:	12Vdc: 60W 24Vdc: 60W
Terminals:	Rising Clamp for 0.5-2.5mm ² Cable
LED Indication:	ON when power on
Ambient Temperature Range:	-30 to +70°C @ 20 to 90% RH
Safety Standards:	UL508, TUV EN60950-1 Approved
EMC Conduction and Radiation:	Compliance to EN55032, EN61000-3-2, -3
Weights & Dimensions:	35mm(W) x 90mm(H) x 54.5mm(D), 120grams
Country of origin:	Taiwan

Product Order Codes

Order Code	Description
ATL-HDR-60-24	Universal Input to 24Vdc Power Supply
ATL-HDR-60-24D	Universal Input to 24Vdc Power Supply, Display

Dimensions**Terminal Pin No. Assignment**

Pin No.	Assignment	Pin No.	Assignment
1,2	-V	5	AC/L
3,4	+V	6	AC/N

Block Diagram