

AX-2102

Mechanical Room Thermostat

AXIO



Product overview

The Axio AX-2102 is a wall mounted room thermostat. The unit has a bellows switch mechanism making them suitable for use with 2-wire mains applications as well as low voltages. The output is a SPDT switch and can be used for heating or cooling applications.

Features

- Large control knob for temperature adjustment
- Heating or Cooling
- Suitable for use on 2-wire mains, or low voltage
- Bellows switch mechanism
- Universal back-plate UK/European fixing

Product specifications

Temperature Ranges	+10 to 30°C
Maximum Operating Temperature	50°C
Switching Differential	1°C
Operating Voltage	Up to 240Vac
Output Rating	3 Amp maximum resistive load at 240Vac (1 Amp inductive)
Output Contacts AX-2102	SPDT - Switched Live
Output Contacts AX-2102-HC	SPDT
Sensing Element	Liquid filled bellows with anticipator
Housing	IP20, White
Dimensions	83 x 83 x 40mm
Weight	80gms
Storage Temperature	-20 to +50°C
Country of Origin	China

Order codes

AX-2102-HC	Mechanical Room Thermostat +10 to 30°C -2 Wire
AX-2102	Mechanical Room Thermostat +10 to 30°C -3 Wire

Order Online at:

www.annicom.com

Email orders and enquiries to:

Sales@annicom.com

ANNICOM

© Copyright Annicom 2017. All Rights Reserved

Annicom Ltd

Unit 21, Highview, Bordon, Hampshire. GU35 0AX

Tel: +44 (0)1420 487788 Fax: +44 (0)1420 487799

Email: sales@annicom.com Website: www.annicom.com

AX-2102


Mechanical Room Thermostat




Caution

The AX-2102 units should be installed by suitably qualified technician in conjunction with any guidelines for the equipment it is to be connected to and any local regulations. Field wiring should be installed to satisfy the requirements set out by the manufacturer of the equipment that the module is being connected to.

Connections

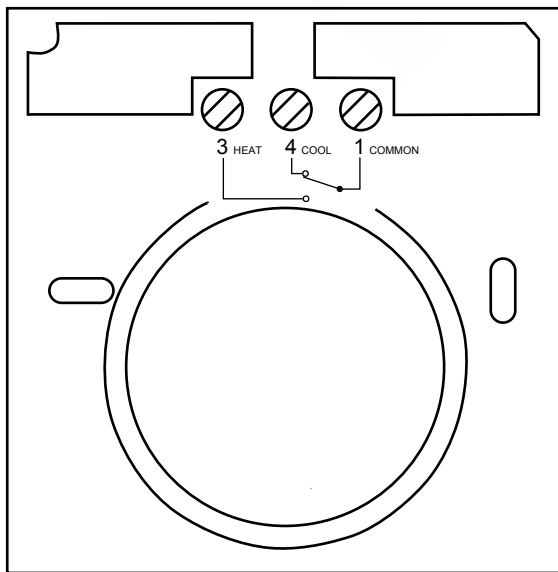

AX-2102-HC

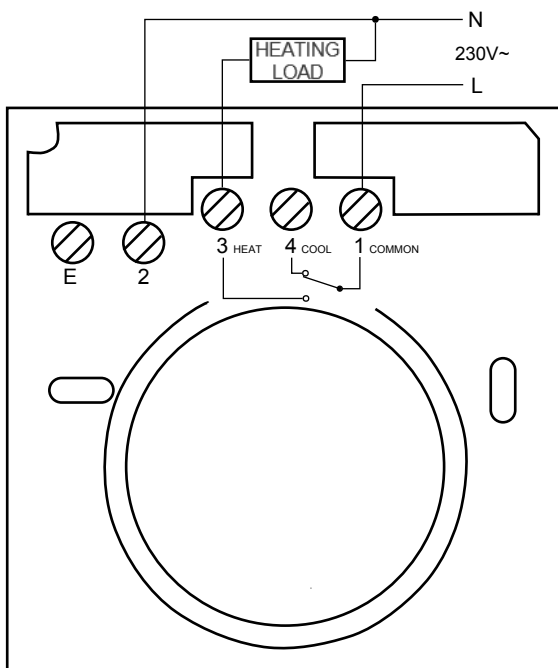

AX-2102

Installation

Select a suitable position for the thermostat away from drafts, heat sources and direct sun, about 1.5m from the floor.

Always isolate the supply before removing the cover.

To remove the cover use a small flat-bladed screwdriver to loosen the fixing screw one turn at the top-most edge of the unit.

The unit can be attached to a standard patress box, or fixed as appropriate to a wall surface using the pre-formed holes in the base.

The AX-2102 has a terminal marked E that can be used to 'park' and earth cable. This unit also has a built-in anticipator - a 230Vac neutral connection is also required for this to operate.

Every effort has been taken in the production of this data sheet to ensure accuracy. Axio do not accept responsibility for any damage, expense, injury, loss or consequential loss resulting from any errors or omissions. Axio has a policy of continuous improvement and reserves the right to change this specification without notice.